

OWI[®]

OWI Incorporated
Established 1978



Model: M6760

THE INNOVATOR OF 360° HIGH CEILING PENDANT SPEAKERS


**COMPACT SIZE, POWERFUL 360° SOUND!
HIGH CEILING PENDANT SPEAKERS FOR
• GYMS • AUDITORIUMS • SCHOOLS • CHURCHS •**

MERCURY

**HIGH CEILING
PENDANT SPEAKER
FOR WIDE DISPERSION**



High Ceiling Applications in Retail Stores, Churches, Night Clubs, Sports Bars, Gyms, Restaurants, Hotels, Atriums and Transportation Centers.

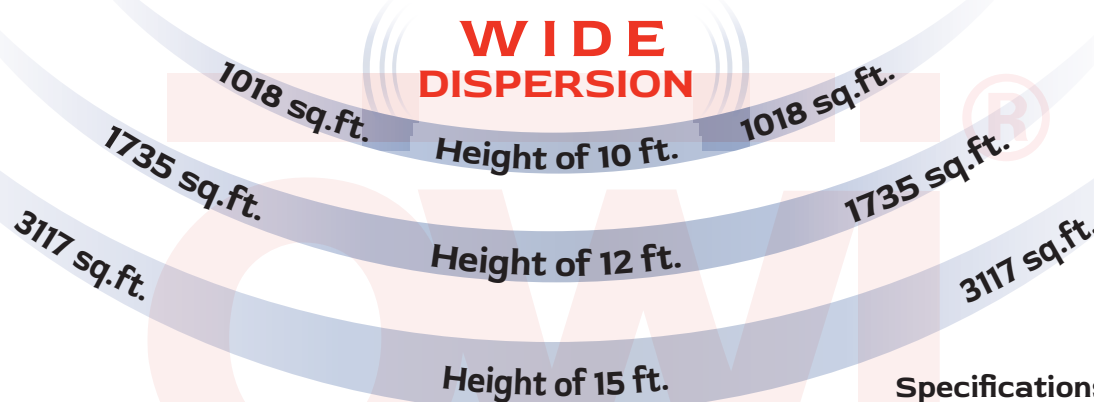

Features:

- » Professional, Commercial Speaker Engineered for High Ceilings and Greater Sound Coverage
- » Selectable Switch - 70/100 V / 8 Q
- » 70 V Transformer Tap - 3.75, 7.5, 15, 30, 60 W
- » 100 V Transformer Tap - 7.5, 15, 30, 60 W
- » Dynamic 3600 Sound - 1800 Dispersion
- » More Dynamic Sound Out of One Speaker
- » Safety Cable Included
- » Easy Installation
- » Free Hanging

Specifications:

Description	
	1 ea. 6.5" Polypropylene Woofer 4 ea. 2.5" Midrange 1 ea. 1" Tweeter 4 Bass Ports
Covered Outdoor	Yes
Impedance	Selectable 70/25/100 V / 8
Sensitivity (1 W / 1 M)	91 dB
Max Power @ 8 Ω	75 w
Max Power	60 w
70 V Transformer Taps	3.75, 7.5, 15, 30, 60 W
100 V Transformer Taps	7.5, 15, 30, 60 W
Frequency Response	65 Hz -20 kHz
Crossover	12 dB @ 4 kHz and 7 kHz (3-Way)
Dispersion	360° H x 180° V
Woofer Size	6.5" - 1 ea.
Woofer Material	HIPS
Midrange Size	2.5 - 4 ea.
Midrange Material	Paper
Tweeter Size	1 ea.
Tweeter Material	Polyethylene
Bass ports	4 ea.
Enclosure	Polyethylene
Grill Material	Powder Coated Aluminum
Dimensions	15" D x 10" H
Net Weight (Unit Only)	8.2 Lbs
Total Weight	12.3 Lbs.
Color(s)	Black, White
Mount Hardware	Safety Cable Included
Paintable	Yes
Warranty	5 Years


Frequency Response Chart




COMPACT SIZE POWERFUL 3600 SOUND!




HIGH CEILING PENDANT SPEAKERS FOR • GYMS •
AUDITORIUMS • SCHOOLS • CHURCHS • LOBBYS • RETAIL

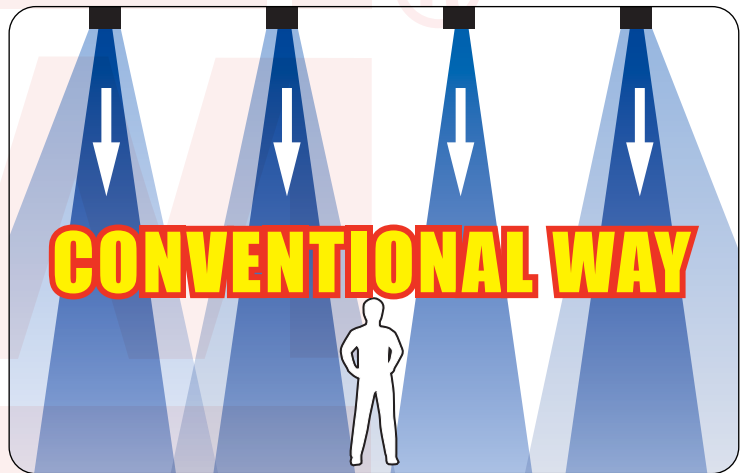


Polar Chart

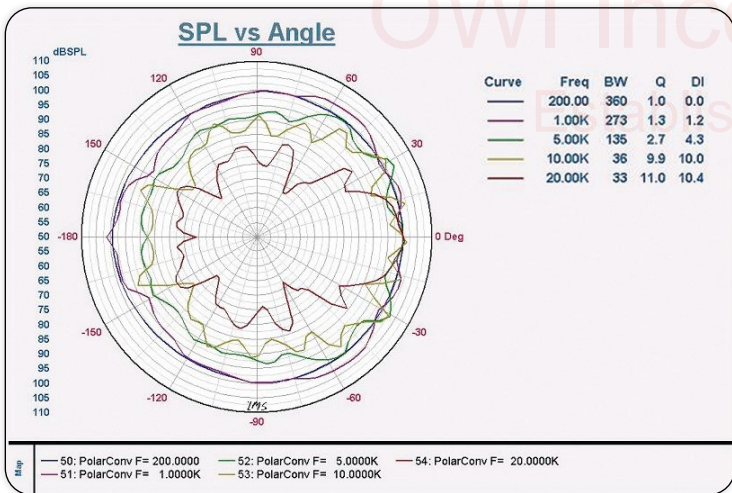


Mercury Pendant Speaker Lineup



10" Subwoofer (4ea.),
2.5" Midrange
Tweeters (1 ea.),
1" Tweeter
4 Bass Ports.



8" Subwoofer (4ea.),
2.5" Midrange
Tweeters (1 ea.),
1" Tweeter
4 Bass Ports.



6.5" Subwoofer (4ea.),
2.5" Midrange
Tweeters (1 ea.),
1" Tweeter
4 Bass Ports.

INSTALLATION GUIDE ±3 dB

Height of the Speaker (Ft.)	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
Distance between Speakers (Ft.)	25	30	36	41	47	52	58	63	69	74	80	85	91
Coverage in Square Feet (Ft ²) per Speaker	491	707	1018	1320	1735	2124	2642	3117	3739	4301	5027	5675	6504

OWI®

OWI Incorporated

Established 1978

17141 Kingsview Ave. Carson CA 90746 USA,
Ph.: 310.515.1900, Toll free: 800.638.1694 Fax: 310.515.1606,
web: www.owi-inc.com, email: info@owi-inc.com